



American Reliance, Inc.

ROCKY DT6 USER GUIDE

Rugged Tablet Computer

20120507



Notice

Copyright© 2012, American Reliance, Inc. All rights reserved.

No part of this publication may be reproduced and modified without the written permission of American Reliance, Inc.

American Reliance, Inc. reserves the right to make changes in the products or the product specifications without any prior notice. Customers are advised to contact American Reliance for updated product information.

American Reliance makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties for the correctness of this book, nor any license grant of American Reliance's patents or intellectual properties. American Reliance assumes no liability for customer's loss or damage caused by using this document.

Trademarks

Windows is a registered trademark of Microsoft Corp.

Intel® Atom™ Processor is a registered trademark of Intel Corp.

All other brand and product names are trademarks or registered trademarks of their respective companies.



Regulatory Information/ Disclaimers

Installation and use of this computer must be in strict accordance with the instructions included in the user documentation provided with the product. Any changes or modifications (including the antennas) made to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment.

The manufacturer is not responsible for any radio or television interference caused by unauthorized modification of this device, or the substitution of the connecting cables and equipment other than manufacturer specified. It is the responsibility of the user to correct any interference caused by such unauthorized modification, substitution or attachment. Manufacturer and its authorized resellers or distributors will assume no liability for any damage or violation of government regulations arising from failing to comply with these guidelines.



FCC (Federal Communications Commission) Statement

This equipment has been tested and found to comply with the limits for a Class-B digital device pursuant part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and radiates radio frequency energy. If not being installed and used in accordance with the instructions, it may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

FCC Caution

To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

CE

Products with the CE Marking comply with both the EMC Directive (2004/108/EC) and the Low Voltage Directive (2006/95/EC) issued by the Commission of the European Community.

Compliance with these directives implies conformity to the following European Norms:

EN55022	CISPR 22 Radio Frequency Interference
EN55024	EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, EN61000-3-2, EN61000-3-3, Generic Immunity Standard
LVD	EN 60950 Product Safety, IEC 60950-1: 2005

R&TTE (CE) Manual Regulatory Requirement

WLAN - IEEE 802.11a/b/g/n

802.11a/b/g/n Restrictions:

European standards dictate maximum radiated transmit power of 100mW EIRP and frequency range 2.400-2.4835 GHz. In France, the equipment must be restricted to the 2.4465-2.4835 GHz frequency range and must be restricted to indoor use.

CE Declaration of Conformity



It is confirmed to comply with the requirements set out in the Council Directive on the approximation of the laws of the member states relating to Electromagnetic Compatibility Directive (2004/108/EC), Low-voltage Directive (2006/95/EC) and the procedures given in R&TTE Directive (99/5/EC).

The equipment was passed, and the equipment test was performed according to the following European standards:

EN 300 328 V1.7.1 (2006)

EN 301 893 V1.4.1 (2007-07)

EN 301 489-1 V1.8.1 (2008-04) / EN 301 489-17 V1.3.2 (2008-04)

EN 50371:2002

EN 60950-1:2005

EN 62311:2008

EN 300 440 V1.6.1 (2010-08)

UL, TÜV

AC Adapter (TÜV includes **LVD EN60950**)

Power Conservation

This tablet computer consumes less power compared to conventional consumer computers. The power consumption may be further reduced by properly configuring the Power Management Setup.

It is recommended that the power saving features be enabled even when not running on battery power. Power Management features can conserve power without degrading system performance.

Power Safety

There are specific power requirements for your tablet computer:

- Only use an approved AC adapter designed for this tablet computer.
- There is a 3-prong grounded plug for the AC adapter. The 3rd prong is an important mechanism for ensuring product safety. Please do not neglect the importance of this mechanism. If you are unable to access a compatible outlet, please hire a qualified electrician to install a compatible outlet for you.
- When unplugging the AC power cord, please make sure to disconnect the cord by pulling from the plug head instead of pulling from the wire to prevent wire damage.
- Make sure the power outlet and any other extension cord(s) you use can support the total current load of all the connected devices.
- Before cleaning the tablet computer, please make sure it is disconnected from any external power source.



Warning

Before any upgrade procedures, make sure the power is turned off, and all the cables are disconnected (including telephone lines). Also, it is advisable to remove your battery to prevent your tablet computer from accidentally turning on.

Battery Precautions

- Only use batteries designed for this tablet computer. Using incompatible battery types may cause explosion, leakage or damage to the computer.
- Do not remove the battery from the computer while the computer is powered on.
- Do not continuously use a battery that has been dropped, or that appears damaged (e.g. bent or twisted) in any way. Even if the computer is able to continuously work with a damaged battery, the circuit damage may occur and possibly cause fire.
- Always use the charger designed for this computer to recharge the battery. Incorrect recharging may cause the battery to explode.
- Do not try to service a battery by yourself. For battery service or replacement, please contact your service representatives.
- Please dispose of damaged battery promptly and carefully. Explosion or leakage may occur, if the battery is exposed to fire, improperly handled or discarded.



Battery Disposal & Caution

The product that you have purchased contains a rechargeable battery. The battery is recyclable. At the end of its service life, under various state and local laws, it may be illegal to dispose of this battery into the municipal waste stream. Check with your local solid waste officials for details in your area for recycling options or proper disposal. Danger of explosion may possibly occur, if the battery is incorrectly replaced. Replace only with the same or the equivalent battery recommended by the manufacturer. Discard the used battery according to the manufacturer's instructions.

Environmental Information, Material Safety & Recycling

All materials used in the manufacturing of this equipment are recyclable or environmentally friendly. Please recycle the packing materials in accordance with local regulations at the end of the product's service life.

Notice:

- The equipment may contain insignificant amount of hazardous substances for health and environment below control level.
- To avoid spreading such substances into the eco system and to minimize the pressure on the natural environment, you are encouraged to reuse or recycle most of the materials in a safe way after the product's service life.
- For more information on collection, reuse and recycle of materials, please consult local or regional waste administrations for more information. You can also contact your dealer for more information on the environmental details of the equipment.
- The symbol of the crossed out wheeled bin indicates that the product (electrical and electronic equipment) should not be placed in municipal waste. Please check local regulations for disposal of electronic products.





TABLE OF CONTENTS

CHAPTER 1 - GETTING STARTED	1
UNPACKING.....	1
WORKPLACE	2
ENVIRONMENTAL RATINGS	2
RUGGEDNESS	2
APPEARANCE OVERVIEW	3
READY FOR USE	7
CHAPTER 2 - OPERATING INFORMATION	9
START USING YOUR TABLET COMPUTER.....	9
STOP USING YOUR TABLET COMPUTER	10
WORKING WITH POWER BUTTON (HEATER KIT).....	11
INSTALLING OPERATING SYSTEM.....	12
USING INDICATORS AND KEYBOARD	13
HARD DISK DRIVE (HDD)	16
USING APPLICATION KEYS & INPUT LOCK KEY	17
USING THE TOUCH SCREEN	18
USING YOUR MICROPHONE.....	20
USING AUDIO FEATURES.....	22
OPERATING WIRELESS DEVICES	23
USING YOUR CAMERA (OPTIONAL).....	30
USING DOCKLIGHT DLDT (OPTIONAL).....	32
CHAPTER 3 - MANAGING POWER.....	35
AC ADAPTER	35
BATTERY.....	36
ACPI SUPPORT	38
CHAPTER 4 - BIOS SETUP	39
MAIN MENU	39
ADVANCED MENU.....	40
BOOT MENU.....	48



SECURITY MENU	49
EXIT MENU	50

CHAPTER 5 - DRIVERS AND APPLICATIONS 51

CHIPSET	51
GRAPHICS CONTROLLER	51
AUDIO	51
WIRELESS DEVICES	52
TOUCH SCREEN	52
DEVICE POWER MANAGER.....	53
GIGABIT LAN.....	53

CHAPTER 6 - SPECIFICATIONS 54

CPU	54
MEMORY.....	54
CORE CHIPSET	54
GRAPHICS CONTROLLER	54
HDD	55
AUDIO	55
DISPLAY.....	55
COMMUNICATION.....	55
I/O PORTS	55
BATTERY.....	55
AC ADAPTER	56
DIMENSIONS & WEIGHT	56
CASE MATERIALS AND COLOR.....	56

CHAPTER 7 - OPTIONAL DEVICES AND ACCESSORIES..... 57

MILITARY 3-PIN DC-IN CONNECTOR	57
CAMERA	57
COMMUNICATION.....	57
EXPANSION SLOTS (SELECT 1).....	57
DOCKLIGHT DLDT	58
EXTERNAL USB KEYBOARD.....	58



VEHICLE ADAPTER EVA1275.....	59
SURGE PROTECTOR SP-200.....	59
DUAL BATTERY CHARGER.....	59
HANDLE.....	59
CHAPTER 8 - MAINTENANCE AND SERVICE	60
CLEANING.....	60
TROUBLESHOOTING.....	60
RMA SERVICE	61

Chapter 1 - Getting Started

Unpacking

The following list of items are packaged and shipped along with your tablet computer. If any of these items is missing or damaged, please notify your dealer immediately.

- Tablet Computer Unit
- AC Adapter
- AC Power Cord
- Utility DVD
- Quick Guide

Workplace

A clean and moisture-free environment is preferred. Make room for air circulation.

Remember to avoid areas from:

- Sudden or extreme changes in temperature.
- Extreme heat.
- Strong electromagnetic fields (Near television set, motor rotation area, etc.).
- Dust or high humidity.

If this tablet computer is required to work in a hostile environment, please maintain your tablet computer regularly by cleaning dust, water, and etc. to keep it in an optimal operating condition.

Environmental Ratings

Operating Temperature: -20 °C ~ +50 °C
Operating Altitude: 0 meter ~ 4,572 meters
Operating Humidity: Up to 95% (non-condensing)


Ruggedness

This tablet computer is designed with rugged features, such as vibration, shock, dust, and rain/water protection. However, it is still necessary to provide appropriate protection while operating in hostile environments.

Appearance Overview


Before starting to use this tablet computer, it is advisable that users take a quick glance to familiarize themselves with the locations of the external components.

Front View

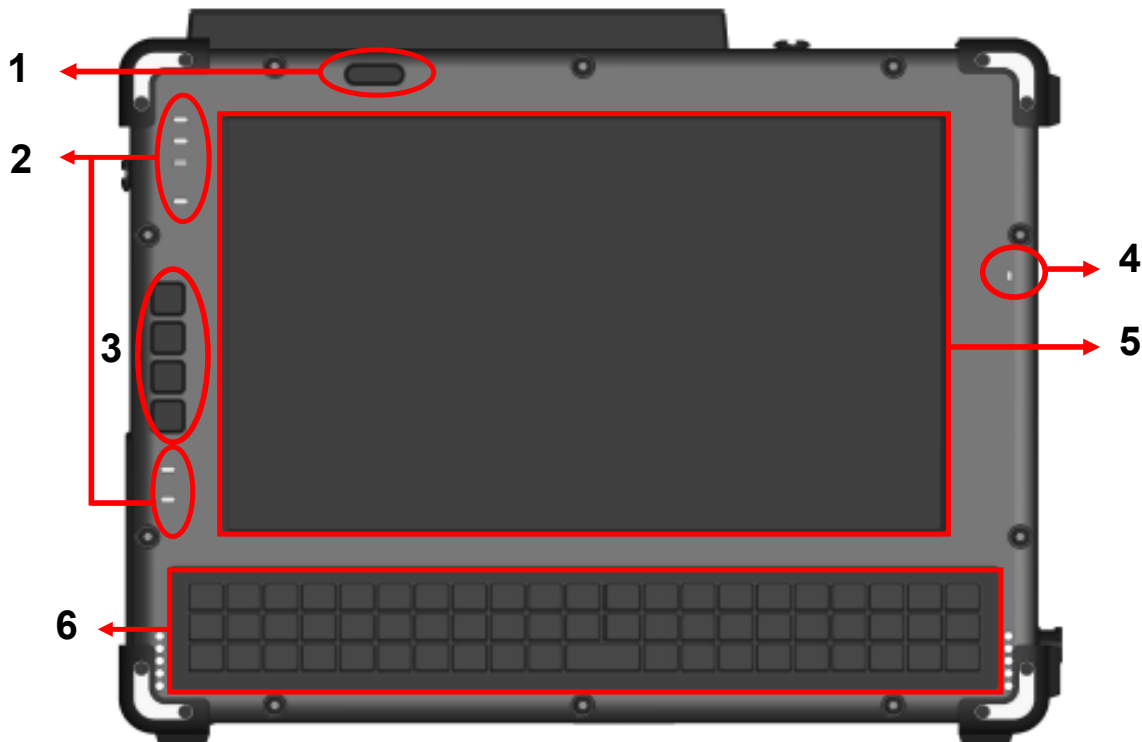

1. Power Button
2. LED Indicators
3. Application Keys & Input Lock Key (Please refer to page 14 for more details)
4. Microphone
5. Touch Screen
6. Keyboard


Rear View

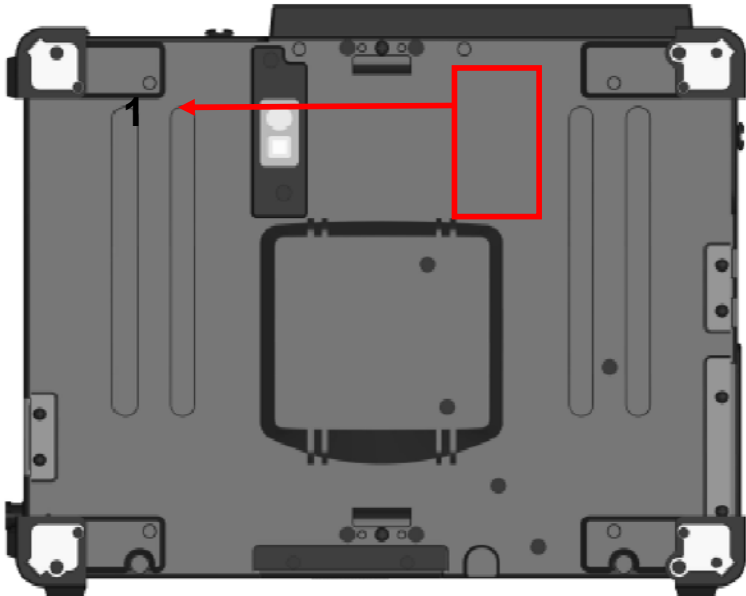


- 1. Optional 2.0 MP Auto-Focus Camera with LED Flashlight

Right-Side View

- 1. Serial Port DB9 x 1
(Default: RS232. RS422/RS485/TTL selectable in BIOS)
- 2. DC Power Jack
(Default: 2-pin. Optional 3-pin Mil. Connector available)

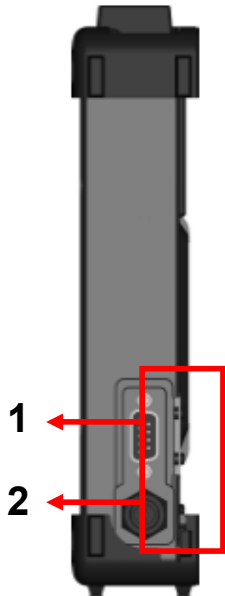

Left-Side View

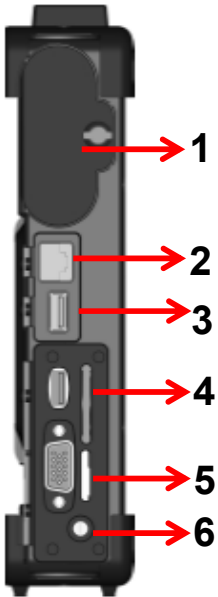


- 1. Battery Pack
- 2. Optional GLAN Port RJ45 x 1
- 3. USB 2.0 Port x 1
- 4. SD (SDHC) Card Slot x 1
- 5. SIM Card Slot x 1
- 6. 3.5 mm Audio Jack x 1
(4-Pole for Headphone and Microphone)

Left-Side Expansion Slot




- Select 1 out of the following:
- RGB Port DB15 x 1 + USB 2.0 Port x 1
 - Optional Smart Card Reader Slot x 1
 - Optional Express Card Slot x 1
(Trade-off with WLAN Module)

Top View

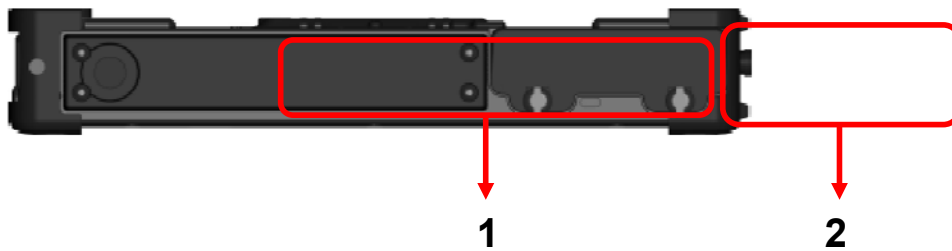

1. Antennas
 - Standard Bluetooth Antenna
 - Optional WLAN, WWAN and GPS Antennas
2. Removable 2.5" SATA HDD/SSD

Bottom View

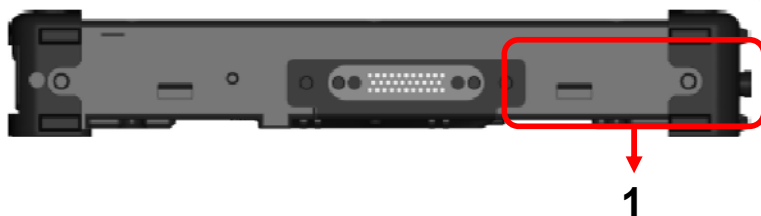



1. Docklight POGO Connector Port
The Docklight POGO Connector carries the following signals:
 - RS232 x 1
 - USB 2.0 (Host) x 1
 - RGB x 1
 - DC-In x 1

Ready for Use

After taking a quick look at your tablet computer, the following illustrations will get you ready for using it.


1. Mounting the Battery

- A. Mount the battery into the battery bay.

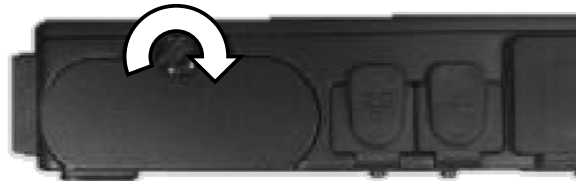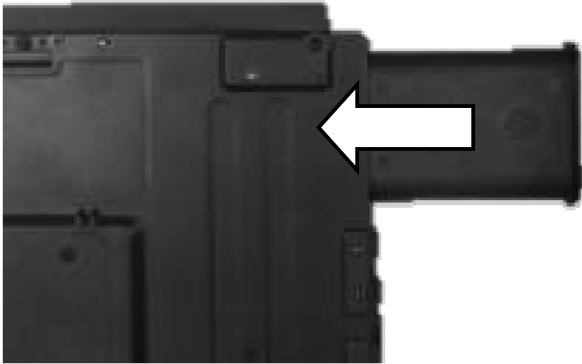


- B. Turn clockwise and lock firmly with a flat-head screwdriver or a coin.

2. Connecting the AC Adapter

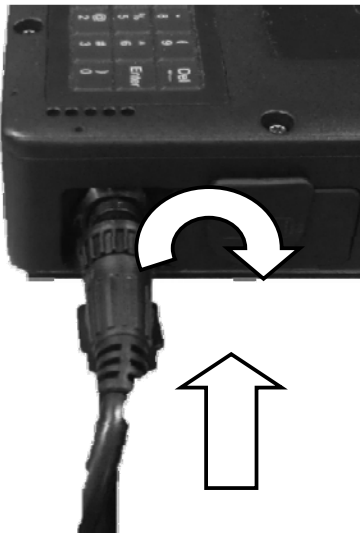

- A. Insert the DC Jack and firmly lock the connector clockwise.

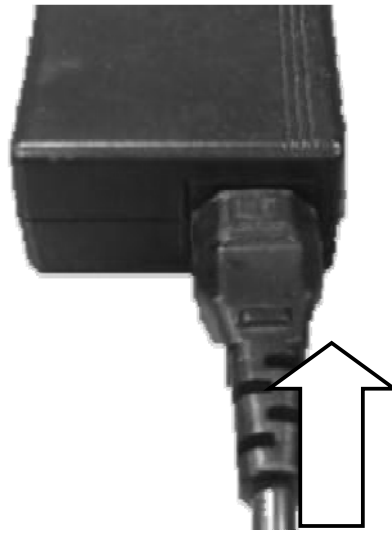


- B. Plug the AC cord into the AC adapter.
C. Plug the AC power plug into an electrical outlet.

3. Turning ON the Power

- A. Make sure the battery is securely mounted. Connect all power cords properly.
- B. Turn on the power of your tablet computer by pressing the “**Power Button**”.



Press  to turn on the power of your tablet computer.

Note:

- *The power is able to turn ON without any battery mounted once all the power cords are connected.*

4. Turning Off the Power

Directly tap “**Shut down**” from your OS to turn OFF the power of your tablet computer. If your tablet computer stops responding, press and hold the power button to “**Force Shut down**” your tablet computer.

Note:

- *Directly turning off the power of your tablet computer by “Force Shut down” will cause all unsaved data to be lost and is not recommended.*

Chapter 2 - Operating Information

Start Using Your Tablet Computer

Always turn on your tablet computer by using the power button. This is the standard operating procedure to start using your tablet computer. After turning on the power of your tablet computer, it will start with the Operating System (OS) installed.

Boot Up

When you turn on the power, your computer will start to load the OS into the system memory. This start-up procedure is called “boot up”.

Power On Self-Test (POST)

Each time your computer is turned on, the BIOS will automatically perform a self-test of CPU, memory, hardware devices, and so on.

Stop Using Your Tablet Computer

Each time when you finish working with your tablet computer, there are several ways to stop your tablet computer from operating.

Shut down

Directly tap “Shut down” from your OS to turn OFF the power of your computer. Before shutting down, please do remember to save any unfinished works and close your applications to prevent your HDD from suffering possible data loss or damage. “Shut down” will turn OFF power of your computer. If you want to start your computer again, you need to turn it ON again by pressing the power button.

Sleep

Under “Sleep” mode, the system will temporarily save your work into the computer’s RAM. If you want to start your computer again, please press the power button to resume. You can enter this mode by directly tapping:

“Start” => “Shut down” => “Sleep” under Windows 7.

Hibernate

Under “Hibernate” mode, the system will save your work into HDD. If you want to start your tablet computer again, you need to press the power button. You can enter “Hibernate” mode by pressing the power button, or by directly tapping:

“Start” => “Shut down” => “Hibernate” under Windows 7.

Force Shut Down

In the event that your tablet computer hangs or stops responding, you can perform a force shut down by pressing and holding the power button for 4~5 seconds. Please note that any unsaved work or data will be lost this way.

Working with Power Button (Heater Kit)

Your tablet computer is equipped with a heater kit to enable work under low temperature. The heater will heat up the HDD to the temperature set by the user before booting the system. Also, the heater will constantly monitor HDD temperature. Once the temperature becomes lower, the heater will heat up again to maintain the temperature set by user.

Note:

- When ambient temperature is under +5 °C (the default setting for your tablet computer), the system may not boot up immediately. System will beep with HDD LED light flashing orange to indicate that the heater is in operation. The LED will blink faster as the HDD temperature approaches operational temperature. After 5~15 minutes, the system will boot up automatically.
- In emergency situations, you can skip the heating process by pressing and holding the power button for 9~11 seconds then release. The speaker will beep with a special sound to signify that the heating process has been skipped (Please note that not all devices are guaranteed to work properly in this case).
- Press the power button again during the heating process will shut down the computer.

The following is a list of functions associated with your tablet computer's power button:

1. Press and hold for 12 seconds, then release:
USB port is enabled and you can set a new value in Heater AP.
2. Press and hold for 9 ~ 11 seconds:
The system will skip heating process and force boot up.
3. Press and hold for 5 ~ 8 seconds:
Enable/Disable the sound of Heater.
4. Press and hold the power button for 4 seconds under OS:
Shut down the system.
5. Press the power button:
 - a. Power on the system.
 - b. Force Shut Down (If pressed while the heating process is underway).
 - c. Sleep/Hibernate (Dependent on OS settings).

Installing Operating System

Your computer is designed to operate with Microsoft Windows 7 32-bit Operating System. Please connect your computer with an external USB-interface drive, such as an ODD or a USB thumb drive, and start the OS installation.






Note:

- *A USB hub may be required during installation to connect with an external USB-interface ODD and Keyboard, as the System USB port may not supply enough power. Please connect your USB hub with extra power supply to complete the installation.*

Using Indicators and Keyboard

Your tablet computer is designed with a keyboard for easy and quick operations. Also, each LED indicator shows different meanings. The description of each LED indicator and keyboard functions are provided for your operational reference.

LED Indicators

LED Indicator	Description
	Power Indicator: Green (Power); Flashing Red (S3: Standby); Flashing Green (Battery power is lower than 15% under S3 mode)
	Charger Indicator: Orange
	HDD Indicator (Dual LED): Green (HDD); Orange (Heater)
	Wireless Devices Indicator: Blue
	Input Lock Indicator: Red
A	Caps Lock Indicator: Green

Keyboard

The 62-key keyboard is a miniaturized keyboard designed to be functionally equivalent to a full size desktop keyboard. Your tablet computer is shipped with 1 of the following 5 keyboard layouts shown below.

1. US International (UI) keyboard layout:



2. Swedish (SV) keyboard layout:



3. British (GB) keyboard layout:



4. Russian (RU) keyboard layout:



5. German (DE) keyboard layout:



To perform 2nd layer combinational keystroke functions (keystroke functions printed in **blue**), press and hold the **[Fn]** key, then press the corresponding key combinations.

A list of useful combinational keystroke functions is provided below for operational reference:

Note: Key combinations provided below are based on UI keyboard layout.

Key	Description
[Fn] + [V]:	Switches your tablet computer's LCD display on or off .
[Fn] + [B]:	Switches your tablet computer's keyboard backlight on or off .
[Fn] + [↑]:	Increases Audio Volume.
[Fn] + [↓]:	Decrease Audio Volume.
[Fn] + [→]:	Increases LCD Brightness.
[Fn] + [←]:	Decreases LCD Brightness.
[Fn] + [Del]:	Backspace Key.
[Fn] + [Tab]:	Escape Key.
[Fn] + [Q] ~ [S]:	Function Key F1 ~ F12 .

Note:

- *The key "AltGr", a standard key in some language keyboard layouts, is omitted in DT6 keyboard layout due to space constraints. The "AltGr" key is equivalent to pressing "Alt" + "Ctrl" key. If you need to access the "AltGr" key, please press "Alt" + "Ctrl" simultaneously.*

Windows Logo Key

The keyboard has a special Windows Logo Key  which launches the **Start Menu** and performs specific Windows shortcuts and functions. For more information regarding the use of Windows Logo Key, please refer to your Windows manual.

Hard Disk Drive (HDD)

The Hard Disk Drive (HDD) / Solid State Drive (SSD)* is a 2.5" type / 9.5mm height standard **SATA interface** data storage device.

The HDD (SSD) is removable. This design provides convenience and security. Please note that the drive can **ONLY** be removed when the power is off.

Note:

- *Avoid dropping your HDD (SSD) module. Do not expose it directly to high temperature, high humidity, and other hazardous environment. NEVER try to disassemble the module. Static discharge may destroy your device and data. Always pick up the module by touching the case only.*

Using Application Keys & Input Lock Key

Application Keys allow functions to be performed quickly and conveniently. Your tablet computer is equipped with 3 Application keys and an Input Lock key for your operational convenience. To operate, simply press the desired Application key.

Application key 1 and Application key 3 are reserved for customization projects. The default function of Application key 2 is to perform as the (optional) camera's shutter, allowing you to take photos or record videos quickly and conveniently at the press of a button.


The Input Lock function can be switched on or off by pressing the Input Lock key. When the Input Lock function is turned on, inputs from both your tablet computer's keyboard and touch screen are disabled. The Input Lock LED indicator will turn on to notify you that the Input Lock function has been enabled.

Any input strokes on the keyboard or touch on the screen during this time will not be processed. The Input Lock function is useful when you want to prevent keys and functions from accidental activations. To turn off this function, simply press the Input Lock key again.


Using the Touch Screen

Your tablet computer is equipped with a highly sensitive touch screen, allowing you to navigate on the touch screen easily without using other external devices. Before using the touch screen, please follow the instructions below to calibrate your stylus pen for a more precise positioning:

1. Tap “Configure” to start.

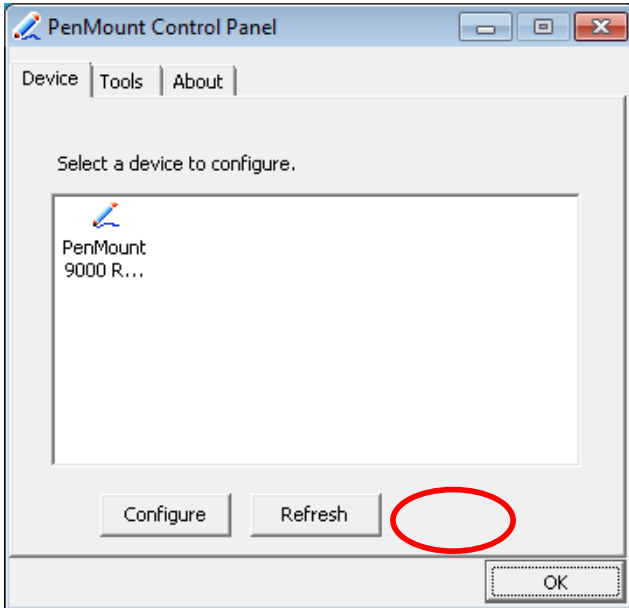

2. Use “Standard Calibration” and follow the instructions.

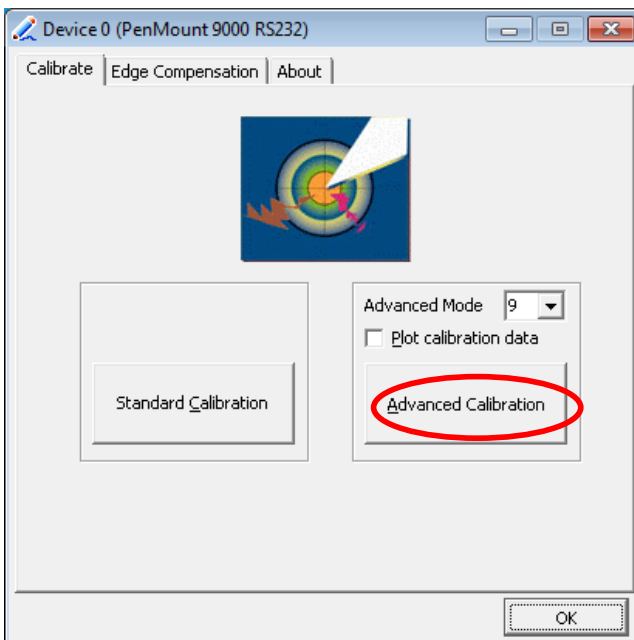


A stylus pen is provided for operating the touch screen. A list of operating tips is provided below to help you operate the touch screen more effectively with your stylus pen.

Desired Operation	Stylus Action
Single Click	Tap the touch screen once with your stylus pen.
Double Click	Quickly tap the touch screen twice with your stylus pen.
Drag and Drop	To drag, tap and hold the object gently with your stylus pen. Without moving your stylus pen away from the touch screen, move your stylus pen until you reach your destination. To drop, simply release your stylus pen from the touch screen.
Right Click	Press and hold your stylus pen on one point of the touch screen for 2~3 seconds. This is the same as using the right click of a mouse.


Using Your Microphone

Your tablet computer is equipped with a built-in microphone. The microphone is capable of sound and voice recording. Please follow the instructions listed below to configure your microphone:

1. If this is your first time using the microphone, please adjust your microphone's DB value. You can modify microphone settings under **Control Panel => Hardware and Sound => Manage Audio Devices**. Tap on the **Recording** tab, select your microphone device, and then tap on **Properties**.

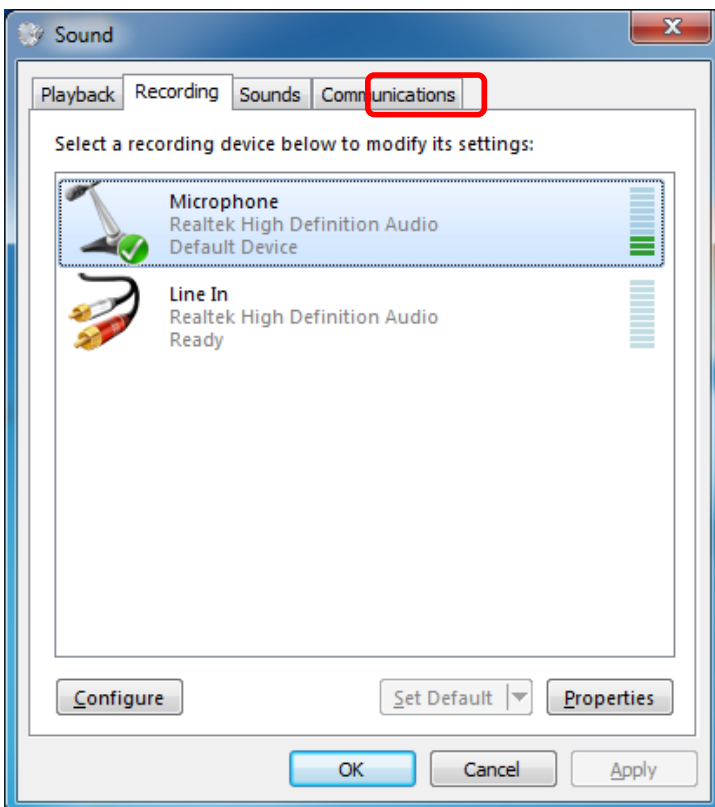

- Under Microphone Properties window, tap on the Levels tab. Adjust your microphone volume and microphone boost to desired levels and tap OK to save changes.

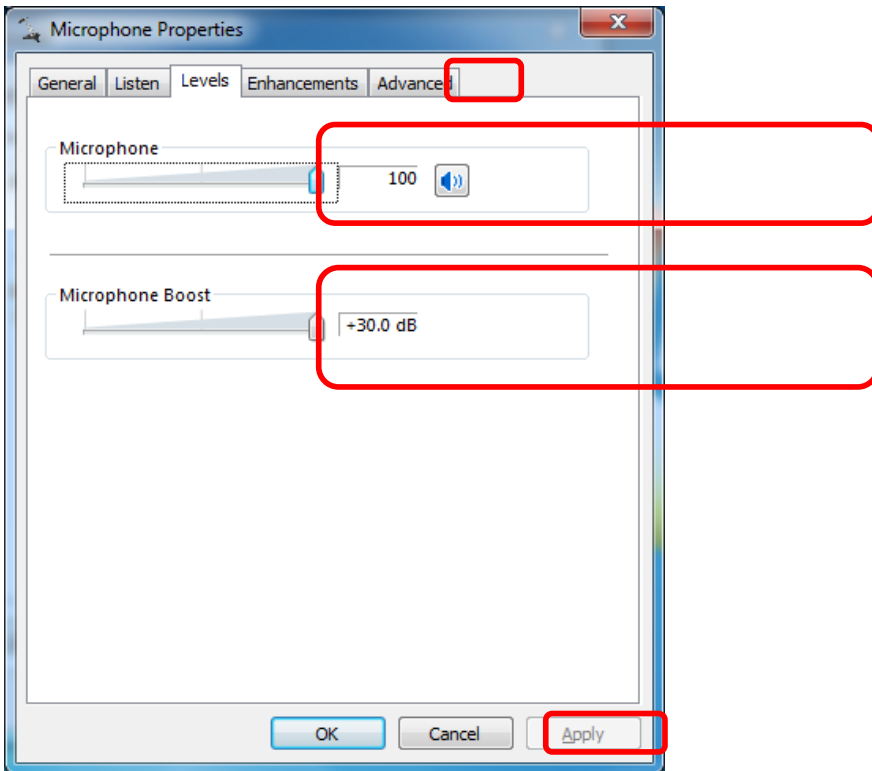

- The built-in microphone of your tablet computer is located at the right side. Please bring your tablet computer closer to the sound source(s) to achieve better recording quality.



The microphone is located at the right.

Start recording with your recorder such as Sound Recorder in Windows 7. You can find Sound Recorder at: **Start => All Programs => Accessories => Sound Recorder**

Using Audio Features

Your tablet computer is equipped with a 3.5 mm 4-pole combo audio jack for headset and headphone.

Note:

- *The combo audio jack does not support a conventional microphone. If a conventional headphone is attached, the headphone function is supported. If a headset with a 3.5mm 4-pole plug is attached, both headphone and microphone functions are supported.*

The following table lists the supported functions of different types of audio devices when attached to the combo audio jack of your tablet computer.

	Headset with 3.5 mm 4-pole plug	Conventional headphone	Conventional microphone
Combo Audio Jack	Headphone and microphone functions supported	Headphone function supported	Not supported

Operating Wireless Devices

For your ease of operations, you can turn on/off your wireless devices through the proprietary software application - “**Device Power Manager**”.

Note:

- *Depending on the configuration of your tablet computer, your Device Power Manager menu may appear differently from the screenshots provided in the following section. Only wireless modules installed in your tablet computer are accessible.*

Bluetooth

A Class 2, Bluetooth® v2.1 + EDR system is installed in your tablet computer. This module is backward compatible with v1.1/1.2/2.0 devices and provides your tablet computer with a short-range wireless communication protocol to connect with other compatible devices via the pre-installed embedded antenna. To activate your Bluetooth functions, please follow the instructions below.

1. Driver & Application Installation

- a. Install the Bluetooth driver first. Read from the Utility DVD and find the directory listed in the readme file to finish installation.
- b. Install the Device Power Manager application. Read from the Utility DVD and find the directory listed in the readme file to finish installation.

2. Launch the Device Power Manager

After launching the utility, please tap “Bluetooth” to enable the Bluetooth function (tap again to disable). Once the Bluetooth function starts up, the wireless LED indicator (color blue) will turn on and the Bluetooth icon will show up in the operating system accordingly.



Tap “Bluetooth” to enable the Bluetooth function (tap again to disable).

Wireless LAN (Optional)

Wireless LAN is an optional wireless communication module for your tablet computer. The Wireless LAN supports IEEE 802.11 a/b/g/n. An embedded antenna will be pre-installed in your tablet computer to access the internet wirelessly. To activate your Wireless LAN function, please follow the illustrations below:

1. Driver & Application Installation

- a. Install the Chipset Driver first. Read from the Utility DVD and find the directory listed in the readme file to finish installation.
- b. Then, install the Device Power Manager application. Read from the Utility DVD and find the directory listed in the readme file to finish installation.

2. Launch the Device Power Manager

After launching the utility, please tap "Wireless LAN" for enabling the Wireless LAN function (tap again to disable).



Tap "Wireless LAN" to enable the Wireless LAN function (tap again to disable).

Once the Wireless LAN function starts up, the wireless device LED indicator will turn on (color blue) and the Wireless LAN icon will appear in the OS accordingly.

Wireless Wide Area Network (Optional)

Wireless Wide Area Network (WWAN) is an optional module for your tablet computer. With pre-installed embedded antenna and the optional 3.5G WWAN module, your tablet computer will be able to engage in WWAN functions.

1. Insert the SIM card

- a. Turn OFF your tablet computer.
- b. Pull down the rubber lock cover.
- c. Insert the SIM card into the SIM card slot.



- d. Firmly push the rubber lock cover back.

Note:

- *If you encounter difficulties in ejecting your SIM card, a coin of suitable size may be used in aiding the ejection of SIM card.*

2. Driver & Application Installation

- a. Please Install the WWAN driver first. For detailed instructions on installation procedures, please read from the Utility DVD and find the directory listed in the readme file. Follow the installation instructions to finish the driver installation.
- b. Install the Device Power Manager application. Read from the Utility DVD and find the directory listed in the readme file to finish installation.



Tap “WWAN” to enable the WWAN function (tap again to disable).

3. Launch the Device Power Manager

After launching the application, please tap “WWAN” for enabling the WWAN function (tap again to disable). Once the WWAN function starts up, the wireless device LED indicator will turn on (color blue).

4. Launch the Connection Manager

After installing appropriate drivers and applications, you can now access the WWAN Connection Manager and setup your WWAN connection parameters. The WWAN Connection Manager software can found from the Utility DVD. Follow the installation instructions to finish the software installation.

A screenshot of the WWAN Connection Manager is provided below for your reference.

The screenshot shows the 'Connection Manager' dialog box with the 'SIM' tab selected. At the top, there is a 'Select' dropdown menu currently showing 'No Device Detected'. Below this is an 'Override' section containing several checkboxes and input fields:

- Primary DNS: [. . .]
- Secondary DNS: [. . .]
- Primary NBNS: [. . .]
- Secondary NBNS: [. . .]
- APN Name: []
- IP Address: [. . .]
- Authentication Preference: [PAP]
- Username: []
- Password: []

At the bottom of the dialog, there is a 'Connect' button, an 'Auto Connect' checkbox, a signal strength indicator icon, and a 'Close' button.

Please input the appropriate parameters for your WWAN connection, such as Primary DNS, APN name and IP Address, into the textbox, then click on the Connect button to access the WWAN connectivity.

GPS (Optional)

GPS is an optional module for your tablet computer. This GPS module supports both GPS and Galileo systems. An embedded antenna is pre-installed in your tablet computer to support the functions of your GPS.

1. Driver & Application Installation

- a. Install the Device Power Manager application:
Read from the Utility DVD and find the directory listed in the readme file to finish installation.
- b. Install the GPS driver:
 - GPS (Driver): Read from the Utility DVD and find the directory listed in the readme file to finish installation.
 - GPS (Application): Read from the Utility DVD and find the directory listed in the readme file to finish installation.



Tap "GPS" to enable the GPS function (tap again to disable).

- c. Install the Device Power Manager Application:
Read from the Utility DVD and find the directory listed in the readme file to finish installation.

2. Navigation & Mapping Software Installation


Please install your 3rd party navigation and mapping software after installing your GPS driver. Refer to your navigation and mapping software manual for installation and procedures on application setup and access.

Using Your Camera (Optional)

Your tablet computer can be equipped with an optional 2 Megapixel CMOS camera for video and image capture functions. You can access the camera application window by pressing the camera button (Application Key 2) or use the application menu button.





Taking Pictures

Tap on the  icon in the camera window to take pictures. Or, you can press the camera button again to capture the images. After taking pictures, your pictures will automatically be saved in:






C:\Documents and SettingsYour Account**\My Document\My Pictures**

Recording Videos

Tap on the  icon in the camera window to recording video. To stop recording, please tap on the  icon. While recording, you can also adjust the volume. After recording video, your video files will automatically be saved in:

C:\Documents and SettingsYour Account**\My Document\My Video**


Other Camera Functions

Camera Functions	Description
	Video Format Properties: Advanced video format adjusting.
	Image Properties: Advanced image settings and camera control.
	Volume Level: Adjust video recording volume.
	Flash LED Settings: Advanced flash LED settings.
	Exit: Exit the camera window.

Using Docklight DLDT (Optional)

The Docklight DLDT is an optional add-on docking and port-expansion unit designed for your tablet computer. The Docklight DLDT also supports hot-plug.


Docklight Ports (Top View)

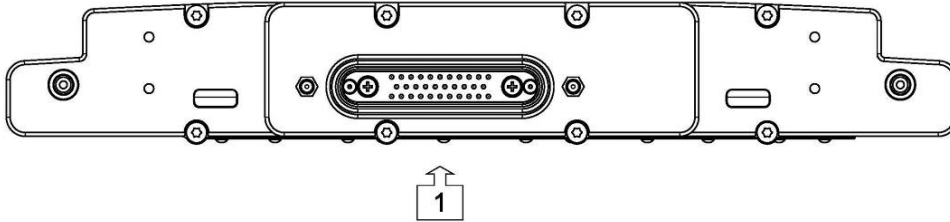

Docklight provides the following port expansions:

1. POGO Connector x 1

Docklight Ports (Bottom View)

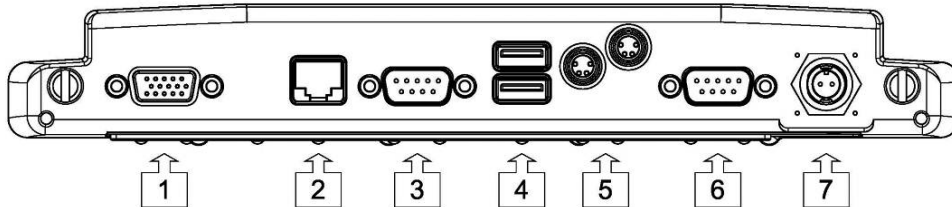


1. RGB Port x 1
2. Mega LAN x 1
3. COM Port x 1 (USB to COM. Default: RS232, Selectable RS422/RS485/TTL)
4. USB Port x 2
5. Sealed USB Port x 2
6. COM Port x 1 (Default: RS232, Selectable RS422/RS485/TTL)
7. DC Power Jack x 1


Mounting the Docklight

The procedures for mounting the Docklight with your tablet computer are as follows:


1. Turn off the power of your tablet computer.
2. Align the docking connectors. The docking connector of your tablet computer can be found at the bottom side of the unit.

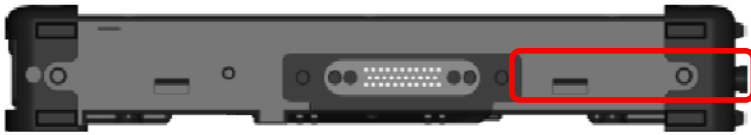

3. Firmly engage the Docklight with your tablet computer.

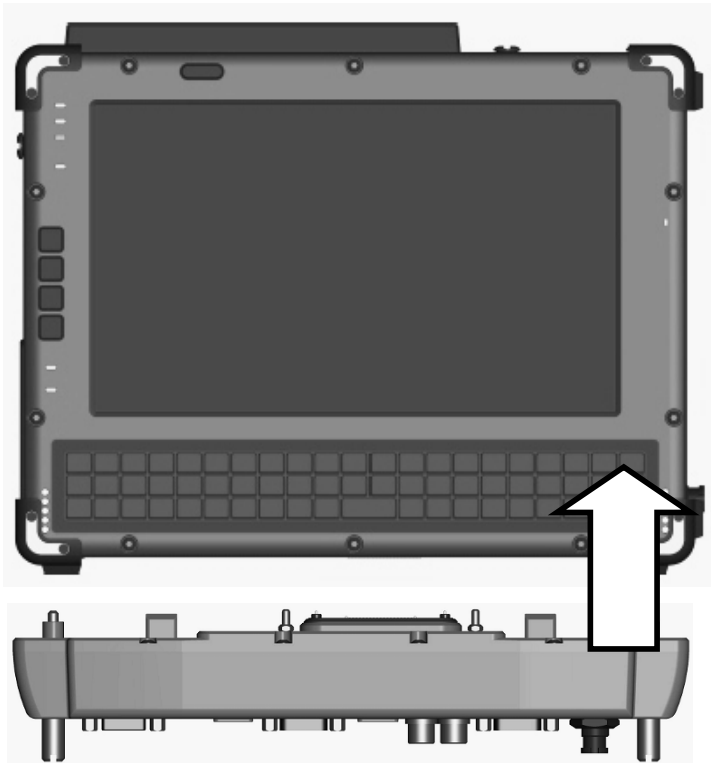

4. Tighten the connecting bolts on both ends of the Docklight by turning the bolts clockwise (turn counter-clockwise to loosen).

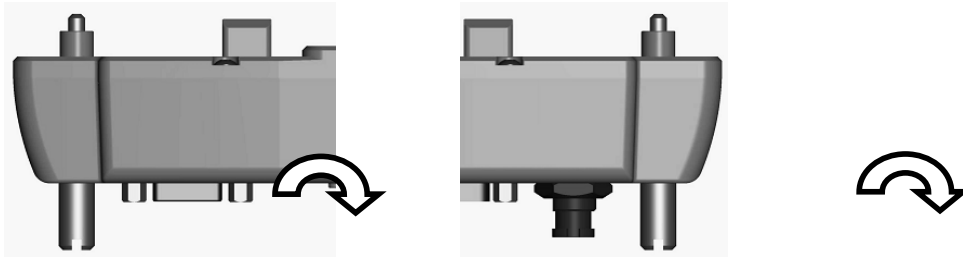

5. Turn on the power on your tablet computer to complete the Docklight installation.

Note:

- *When mounting the Docklight, it is recommended that the tablet computer be turned upside-down for easier installation.*

Chapter 3 - Managing Power

AC Adapter

The AC adapter performs two functions:

- It powers the computer from an external AC source.
- It charges the computer battery.

The adapter automatically detects the AC line voltage (100V or 240V) and adjusts accordingly.

The following are recommended when using the AC adapter:

- Use a properly grounded AC outlet.
- Use one AC outlet exclusively for the computer. Having other appliances on the same line may cause interference.
- Use a power strip with built-in surge protection.

Connecting the AC adapter:

- Plug the AC cord to the adapter.
- Plug the other end of the AC cord into the wall outlet. Make sure the green LED on the adapter turns on.
- Attach the DC plug into the power jack of the computer; turn the lock ring clockwise to secure it.

AC Adapter Indicator:

The green LED indicates that AC power is ready.

Note:

- *To ensure system stability, please connect your computer to an external power source when operating at -20 °C ambient temperature.*

Battery

The power source will automatically switch to battery when the external power source (AC adapter or optional vehicle adapter) is disconnected.

Battery Low

When the battery is nearly exhausted, the computer gives the following “Battery Low” warnings:

- Windows battery low warning (when operating system is Windows).
- The power LED flashes.

Once the Battery Low warning occurs, please:

- Save and close the files you are currently working on.
- Plug in the AC adapter to recharge the battery.

Charging the Battery

Plug in the AC adapter (or optional vehicle adapter) to start the battery charging. If the battery is already full, the sense circuitry will stop high current charge within several minutes.

Battery Gauge

You can check the battery status from battery gauge in Windows. Tap the power/battery icon on your taskbar to reveal the battery gauge window.



Battery Power Saving Tips

The computer comes with an intelligent power-saving feature. You may extend the battery life by:

- Setup power saving features in Operating System Power Management options (e.g. Windows Power Options).
- Lower the intensity of the display by brightness control.
- Use Sleep/Hibernate option when computer is temporarily not in use.
- Shut down the computer when not in use for extended period of time.

Replacing Battery

When the battery is nearly exhausted, there are two ways to keep your tablet computer working. Connect the AC adapter and the power cord designed for this tablet computer to start charging is one method; directly replace a charged battery designed for this tablet computer may be the other one.

Note:

➤ *Always remember to turn OFF the power before replacing the battery.*

ACPI Support

Your computer supports ACPI (Advanced Configuration and Power Interface) for power management. With ACPI and an ACPI-compliant operating system (such as Microsoft Windows), this feature will allow you to reduce the power consumption and conserve energy. By supporting ACPI, the AC adapter LED and the Power indicator LED will show in different ways. The followings are detailed descriptions of LED indicators and their meanings:

Sleep:

Power LED indicator is blinking RED; Other LED indicators are OFF

Hibernate:

All LED indicators are OFF

Shut down:

All LED indicators are OFF

Chapter 4 - BIOS Setup

If you wish to change the BIOS settings of your tablet computer, turn on the power of your tablet computer and press “Del” key on your Mini Keyboard during boot-up sequence to enter the BIOS Setup Utility.

Main Menu

In Main Menu, you can access the System Overview as well as the operating instructions.

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Exit
System Overview				
AMIBIOS Version :08.00.15 Build Date :11/03/11 ID :1AAAA000	Use [Enter], [TAB] or [SHIFT-TAB] to select a field. Use [+] or [-] to configure system Time.			
Processor Intel(R) Atom(TM) CPU Z530 @ 1.60GHz Speed :1600MHz Count :1				
System Memory Size :2039MB	← Select Screen ↑↓ Select Item +- Change Field Tab Select Field F1 General Help F10 Save and Exit ESC Exit			
System Time [16:15:25] System Date [Tue 11/29/2011]				
CMC Lo-Module: OD2.026x, Hi-Module:OD2.018x				

Main Menu Selections

You can make the following changes under the Main Menu Selections.

Feature	Options	Description
System Time	HH:MM:SS	Set the system time Hour, Minute, Second.
System Date	MM/DD/YYYY	Set the system date Month, Day, and Year.

Advanced Menu

In Advanced Menu, you can access the following advanced settings.

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Exit
Advanced Settings		Configure the IDE device (s).		
Warning: Setting wrong values in below sections may cause system to malfunction.				
▶ IDE Configuration				
▶ SuperIO Configuration				
▶ USB Configuration				
▶ DEVICES Control				
Thermal cooling trip point	[79C]			
Critical trip point	[103C]			
Installed O/S	[Windows 7]			
		←	Select Screen	
		↑↓	Select Item	
		Enter	Go to Sub Screen	
		F1	General Help	
		F10	Save and Exit	
		ESC	Exit	

Advanced Menu Selections

You can make the following changes under the Advanced Menu Selections.

Feature	Options	Description
IDE Configuration		Configure the IDE device (s).
SuperIO Configuration		Configure SuperIO Chipset SMC227.
USB Configuration		Configure the USB support.
DEVICES Control		Configure the onboard devices.
Thermal cooling trip point	<ul style="list-style-type: none"> • 15c • 71c • 23c • 79c • 31c • 87c • 39c • 95c • 47c • 103c • 55c • 111c • 63c • 119c 	This value controls the temperature of the Thermal cooling trip point.
Critical trip point	<ul style="list-style-type: none"> • 15c • 79c • 23c • 87c • 31c • 95c • 39c • 103c • 47c • 111c • 55c • 119c • 63c • 127c • 71c 	This value controls the temperature of the Critical trip point.
Installed O/S	Win XP/Dos Windows 7 Linux	Configures the installed O/S.

IDE Configuration Sub-Menu

In IDE Configuration Sub-Menu, you can change the configuration of your IDE devices.

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Exit
IDE Configuration		Options		
ATA/IDE Configuration		[Compatible]		
▶ Primary IDE Master		: [Hard Disk]		
▶ Primary IDE Slave		: [Not Detected]		
Hard Disk Write Protect		[Disabled]		
IDE Detect Time Out (Sec)		[35]		
ATA(PI) 80Pin Cable Detection		[Device]		
		← Select Screen		
		↑↓ Select Item		
		+- Change Option		
		F1 General Help		
		F10 Save and Exit		
		ESC Exit		

IDE Configuration Sub-Menu Selections

You can make the following changes under the IDE Configuration Sub-Menu Selections.

Feature	Options	Description
ATA/IDE Configuration	Disabled Compatible	Enable or disable ATA/IDE compatibility.
Primary IDE Master		Configure the Primary IDE Master device.
Primary IDE Slave		Configure the Primary IDE Slave device.
Hard Disk Write Protect	Disabled Enabled	Disable/Enable device write protection. This will be effective only if device is accessed through BIOS.
IDE Detect Time Out (Sec)	• 0 • 20 • 5 • 25 • 10 • 30 • 15 • 35	Select the time out value for detecting ATA/ATAPI device (s).
ATA(PI) 80Pin Cable Detection	Host & Device Host Device	Configure whether Host, Device, or Host & Device should be allowed to detect the type of IDE cable used.

Primary IDE Master (Slave) Sub-Menu

In Primary IDE Master (Slave) Sub-Menu, you can change specific settings, such as mode and rate of data transfer, of your IDE devices.

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Exit
Primary IDE Master			Select the type of device connected to the system.	
Device :Hard Disk Vendor :Toshiba MK5065GSX Size :500.1GB LBA Mode :Supported Block Mode :16 Sectors PIO Mode :4 Async DMA :MultiWord DMA-2 Ultra DMA :Ultra DMA-5 S.M.A.R.T :Supported				
Type		[Auto]	←	Select Screen
LBA/Large Mode		[Auto]	↑↓	Select Item
Block (Multi-Sector Transfer)		[Auto]	+ -	Change Option
PIO Mode		[Auto]	F1	General Help
DMA Mode		[Auto]	F10	Save and Exit
S.M.A.R.T.		[Auto]	ESC	Exit
32Bit Data Transfer		[Auto]		

Primary IDE Master (Slave) Sub-Menu Selections

You can make the following changes under the Primary IDE Master Sub-Menu Selections. You can change the configuration of your Primary IDE Master (Slave) devices. Please note that the Primary IDE Slave Sub-Menu Selection is identical to the Primary IDE Master Sub-Menu Selection.

Feature	Options	Description
Type	Not Installed Auto CD/DVD ARMD	Select the type of device connected to the system.
LBA/Large Mode	Disabled Auto	Disabled: Disables LBA Mode. Auto: Enables LBA mode if the device supports it and the device is not already formatted with LBA mode disabled.
Block (Multi-Sector Transfer)	Disabled Auto	Disabled: The Data transfer from and to the device occurs one sector at a time. Auto: The Data transfer from and to the device occurs multiple sectors at a time if the device supports it.
PIO Mode	Auto 0 1 2 3 4	Select PIO mode.
DMA Mode	Auto SWDMA0 SWDMA1 SWDMA2 MWDMA0 MWDMA1 MWDMA2 UDMA0 UDMA1 UDMA2 UDMA3 UDMA4 UDMA5	Select DMA Mode. Auto: Auto detected SWDMA: SingleWordDMA MWDMA: MultiWordDMA UDMA: UltraDMA
S.M.A.R.T.	Auto Disabled Enabled	S.M.A.R.T. stands for Self-Monitoring, Analysis and Reporting Technology.
32Bit Data Transfer	Disabled Enabled	Enable/Disable 32-bit Data Transfer.

Super IO Configuration Sub-Menu

In Super IO Configuration Sub-Menu, you can change the configuration of your COM ports

BIOS SETUP UTILITY	
Main	Advanced
<p>Configure SMC227 Super IO Chipset</p> <p>COM 1 Mode Setting [RS232] COM 1 Mode Setting [RS232]</p>	<p>mode options: [RS232] : External Device [TTL1] : Internal Device [RS422] : External Device [RS485] : External Device</p> <p>← Select Screen ↑↓ Select Item +- Change Option F1 General Help F10 Save and Exit ESC Exit</p>

Super IO Configuration Sub-Menu Selections

You can make the following changes under the Super IO Configuration Sub-Menu Selections.

Feature	Options	Description
COM 1 Mode Setting	RS232 RS422 RS485 TTL1	Configure the mode of operation for COM 1 port.
COM 2 Mode Setting	RS232 RS422 RS485 TTL1	Configure the mode of operation for COM 2 port.

USB Configuration Sub-Menu

In USB Configuration Sub-Menu, you can change the configuration of your USB module and devices.

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Exit
USB Configuration		Enable support for legacy USB. AUTO option disables legacy support if no USB devices are connected.		
Module Version – 2.23.4-13.4				
USB Devices Enabled : 2 Hubs				
Legacy USB Support [Enabled] USB 2.0 Controller Mode [HiSpeed] BIOS EHCI Hand-Off [Enabled]				
		← Select Screen ↑↓ Select Item +- Change Option F1 General Help F10 Save and Exit ESC Exit		


USB Configuration Sub-Menu Selections

You can make the following changes under the USB Configuration Sub-Menu Selections.

Feature	Options	Description
Legacy USB Support	Disabled Enabled Auto	Enable support for legacy USB. AUTO option disables legacy support if no USB devices are connected.
USB 2.0 Controller Mode	FullSpeed HiSpeed	Configure the USB 2.0 controller in HiSpeed (480Mbps) or FullSpeed (12Mbps).
BIOS EHCI Hand-Off	Disabled Enabled	This is a workaround for OSeS without EHCI hand-off support. The EHCI ownership change should claim by EHCI driver.

DEVICES Control Sub-Menu

In DEVICES Control Sub-Menu, you can change the configuration of your onboard devices, such as WLAN, WWAN, GPS, Bluetooth, or Camera.

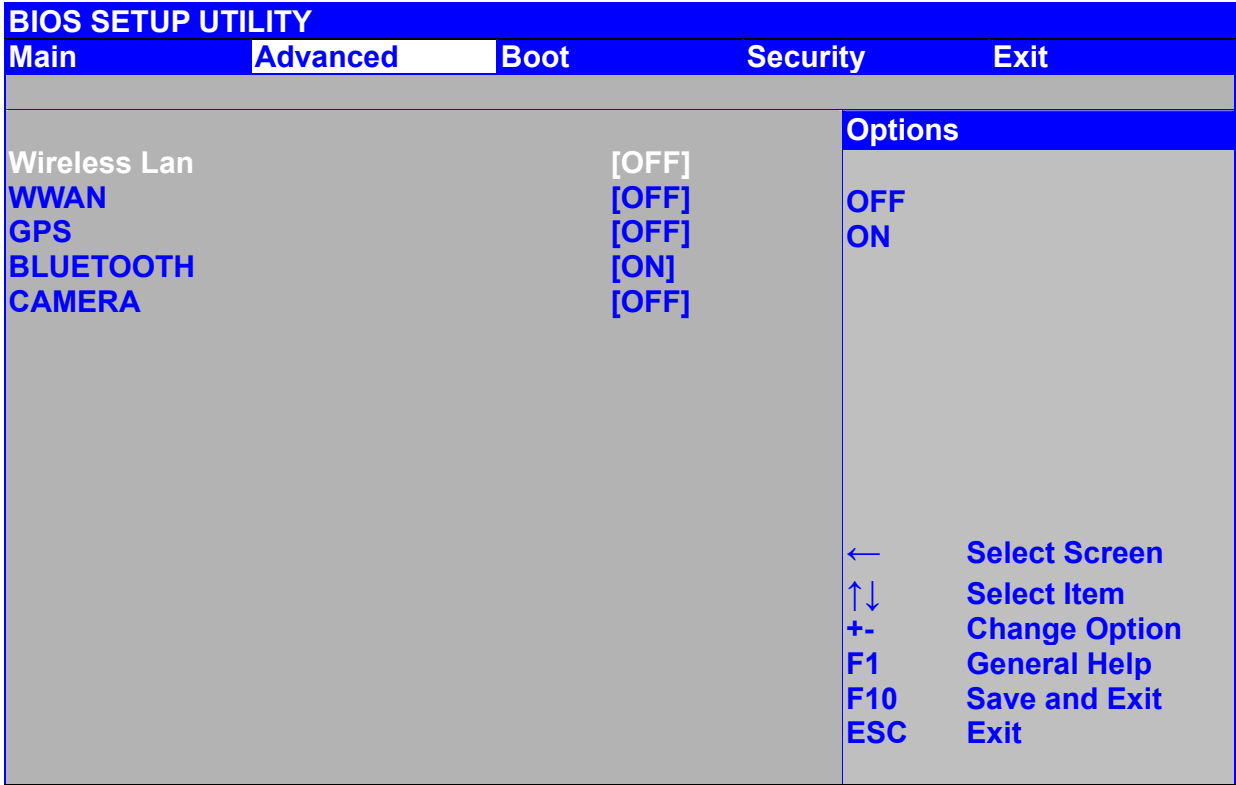

DEVICES Control Sub-Menu Selections

You can make the following changes under the DEVICES Control Sub-Menu Selections.

Feature	Options	Description
Wireless Lan	OFF ON	Toggle Wireless Lan device ON/OFF.
WWAN	OFF ON	Toggle WWAN device ON/OFF.
GPS	OFF ON	Toggle GPS device ON/OFF.
BLUETOOTH	OFF ON	Toggle Bluetooth device ON/OFF.
CAMERA	OFF ON	Toggle Camera device ON/OFF.

Boot Menu

In Boot Menu, you can access the following boot settings.

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Exit
Boot Settings		Specifies the boot sequence from the available devices.		
1st Boot Device	[USB]		A device enclosed in parenthesis has been disabled in the corresponding type menu. ← Select Screen ↑↓ Select Item +- Change Option F1 General Help F10 Save and Exit ESC Exit	
2nd Boot Device	[SATA: PM-TOSHIBA MK]			
3rd Boot Device	[CD/DVD]			
4th Boot Device	[Removable Dev.]			
5th Boot Device	[Network: Realtek Bo]			

Your tablet computer will attempt to boot from the available boot devices in sequence. This feature is useful when you wish to boot your tablet computer from alternative boot devices for troubleshooting, maintenance or service.

Security Menu

In Security Menu, you can access the following security settings.

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Exit
Security Settings		Install or Change the password.		
Supervisor Password :Not Installed User Password :Not Installed		Change Supervisor Password Change User Password		
Boot Sector Virus Protection [Disabled]		← Select Screen ↑↓ Select Item Enter Change F1 General Help F10 Save and Exit ESC Exit		

You can setup Supervisor Password, User Password, as well as Disable/Enable Boot Sector Virus Protection.

Feature	Options	Description
Change Supervisor Password		Supervisor Password controls access to the BIOS setup utility.
Change User Password		User Password controls access to boot the tablet computer.
Boot Sector Virus Protector	Disabled Enabled	Enable/Disable Boot Sector Virus Protection.

Exit Menu

In Exit Menu, you access the following exit option settings.

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Exit
Exit Options		Exit system setup after saving the changes. F10 key can be used for this operation.		
Save Changes and Exit				
Discard Changes and Exit				
Discard Changes				
Load Optimal Defaults		← Select Screen ↑↓ Select Item Enter Go to Sub Screen F1 General Help F10 Save and Exit ESC Exit		
Load Failsafe Defaults				

You can save, discard, and load BIOS settings of your tablet computer here. Any unsaved changes to the BIOS setting will be discarded.

Chapter 5 - Drivers and Applications

The Utility DVD includes all the drivers for the installed devices in your tablet computer. Please consult the dealer if there is any driver missing. Also, through Device Manager in Windows, you are able to perform “Driver Update” or check if there are still drivers for the devices needed to be installed. Please check the readme file on Utility DVD to get the latest information before installing device drivers.

Note:

- *Please install the chipset driver first.*
- *If the system requests for reboot after installing drivers, please reboot your tablet computer first before installing other drivers.*

Chipset

To install appropriate chipset drivers for your tablet computer, please read from the Utility DVD and find the directory in readme. Follow the instructions to complete the chipset drivers installation.

Graphics Controller

Your tablet computer supports Intel® GMA500 graphics controller, giving you a flexible, programmable architecture that supports high-definition video decoding and image processing. Please read from the Utility DVD and find the directory in readme and follow the instructions to finish installation.

Audio

Your tablet computer provides a high-quality audio sound effect for user to enjoy better sound quality. To activate this function, please read from the Utility DVD and find the directory in readme to finish installation.

Wireless Devices

Your tablet computer supports wireless communication. Bluetooth is a standard equipped wireless device. If your model supports optional wireless connection, please see the following to install the drivers and applications.

Bluetooth

Please read from the Utility DVD and find the directory in readme to finish installation.

WLAN (Optional)

Depending on the model you choose; if your tablet computer is equipped with a WLAN model, please follow the installation instructions found in the Utility DVD to complete your driver installation. This will allow you to connect your tablet computer with the internet wirelessly.

WWAN (Optional)

Depending on the model you choose; with pre-installed embedded antenna and the optional 3.5G WWAN module, DT6 will be able to do the telecommunication after installing with a 3.5G SIM card. Please read from the Utility DVD to complete driver installation.

GPS (Optional)

Depending on the model you choose; being able to activate the function, please follow the installation as below:

- GPS (Driver): Read from the Utility DVD and find the directory in readme to finish installation.
- GPS (Application): Read from the Utility DVD and find the directory in readme to finish installation.

Touch Screen

Your tablet computer is equipped with a highly sensitive touch panel. Please follow the installation instructions to start using your touch screen. Read from the Utility DVD and find the directory in readme to finish installation.

Device Power Manager

Device Power Manager is an exclusive application designed and developed for the Wireless Devices of your tablet computer. Through Device Power Manager, turning the power ON or OFF become more convenient for being one of the power-saving tips. Read from the Utility DVD and find the directory in readme to finish installation.

Note:

- *The driver of AutoHotkey has been packed into Device Power Manager. To activate the keyboard hotkey notifications, please install this application.*

Gigabit LAN

An optional gigabit LAN function is also supported in your computer. Users are able to surf the internet with the Gigabit LAN function. Read from the Utility DVD and find the directory in readme to finish installation.

Chapter 6 - Specifications

CPU

- Intel® Atom™ Processor Z530 1.6 GHz
- 512 KB L2 Cache
- 533 MHz FSB

Memory

- 2 GB DDR2 at 533 MHz

Core Chipset

The Intel® System Controller Hub (Intel® Poulsbo SCH) provides reliable, power-efficient performance to your tablet computer. The detailed specification of this chipset is provided below:

- IDE interface: Parallel ATA interface (PATA) x 1 (Ultra DMA 100/66/33 supported)
- PCI Express: 2 PCIe x1
- General Purpose I/O (GPIO): 14 GPIO pins
- USB Interface: 8 hosts 2.0 ports
- Intel® High Definition Audio (Intel® HD Audio) Controller
- Secure Digital I/O (SDIO1.1) x 1
- LPC interface: LPC 1.1 Specification.
- uFCPGA 1249 Balls package

Graphics Controller

- Intel® GMA (Graphics Media Accelerator) 500
- Supporting Microsoft® DirectX 9.0c and Open GL 1.1
- Sharing Max. 509 MB System Memory

HDD

- Removable 2.5" SATA HDD or SSD (Solid State Disk)
- SATA Interface

Audio

- HD codec and amplifier
- Stereo Speaker (Front Side)
- Embedded microphone (Front Side)

Display

- 8.9" Anti-Glare WSVGA TFT LCD w/ LED B/L
- 1024 x 600 Resolution
- Single Touch, Anti-Reflective Touchscreen
- Min. 192 ~ Typ. 240 nits

Communication

- Bluetooth® V2.1 + EDR (Class 2)

I/O Ports

- USB 2.0 x 1
- COM Port x 1
- Docklight POGO Connector x 1

Battery

- 11.1 V, 4800 mAh Lithium-ion Battery
- 6 hours Operating Time

AC Adapter

- 90 W AC 100 V - 240 V 50 / 60 Hz
- Auto Sensing / Switching Worldwide Power Supply

Dimensions & Weight

- 250 mm (W) x 190 mm (D) x 34.8 mm (H)
- 2.0 kg (all optional modules, HDD & battery)

Case Materials and Color

Antenna Cover:	Recyclable UL grade PC + ABS GE C2800 or C6200
Body:	Magnesium Alloy AZ91D
Expansion Slot Cap:	Thermoplastic Polyurethane TPU
I/O Cap:	Thermoplastic Rubber TPR
Keypad:	Silicon Rubber
PCB:	FR-4, UL 94V0
Battery:	Rechargeable Lithium Ion (Electrochemistry system: $\text{LiCoO}_2 + \text{C} = \text{Li}_1 - \text{XCoO}_2 + \text{CLiX}$)
Packing:	Carton - Recycled/Recyclable Paper (unbleached) Cushion - Recyclable EPE Carrying Bag - Recyclable PE Fiber Quick Guide - Recycled/Recyclable Paper
Color:	Black

Chapter 7 - Optional Devices and Accessories

Military 3-Pin DC-In Connector

Your tablet computer has an optional military 3-pin DC-in connector option available. Military 3-pin DC-in connector provides better durability and ruggedness compared to standard 2-pin connectors.

Camera

The optional 2 million-pixel CMOS camera is equipped with a LED flashlight, supporting both image and video capture. It supports output resolution of up to 1600x1200 for image, and video recording resolution of 640*480 @ 30 frames per second.

Communication

- Giga LAN: RJ45 port supporting Ethernet functions
- Wireless LAN: supporting IEEE 802.11 a/b/g/n
- WWAN: HSDPA/UMTS 3.5G
- GPS: u-blox LEA-6H

Expansion Slots (Select 1)

Your tablet computer supports the following expansion slots configuration:

- Default: RGB Port DB15 x 1 + USB 2.0 Port x 1
- Optional: Smart Card Reader Slot x 1
- Optional: Express Card Slot x 1 (Trade-off with WLAN Module)

Docklight DLDT

The Docklight DLDT is a CE/FCC certified optional add-on docking and port-expansion unit designed for your tablet computer. The DC voltage requirement is 12 V ~ 32 V. It supports hot-plug and provides the following expansion ports:

- RGB Port x 1
- Mega LAN x 1
- COM Port x 1 (USB to COM, Default: RS232. Selectable: RS422/RS485/TTL)
- COM Port x 1 (Default: RS232. Selectable: RS422/RS485/TTL)
- USB Port x 2
- Sealed USB Port x 2

External USB Keyboard

An optional 89-key external USB keyboard with LED backlight and IP rating of IP54 is available for your tablet computer. The detailed specification is provided below:

- 89-key layout emulates 101/102-key KB
- Life: >1 million times, water/dust protection up to IP54
- Back-light illumination (backlight device: green LED)
- PS/2 compatible Trackpoint and mouse buttons
- Dimensions: 323.4 mm (W) x 172 mm (D) x 25 mm (H)
- Weight: 1.1 kg

Vehicle Adapter EVA1275

Vehicle Adapter EVA1275 is an optional vehicle adapter for your tablet computer, complying with MIL-461F and MIL-1275D requirements. The detailed specification is provided below:

- Input Voltage: 12~32V
- Input Current: 8A max
- Output Voltage: 19V
- Output Current: 4A
- Wiring: Cigarette lighter/ Truck battery
- Application: Car or Truck installation

Surge Protector SP-200

Surges Protector SP-200 is designed for all equipment to directly connect with the vehicle power system. Containing the reverse polarity protection and the clamping of high voltage input, SP-200 Surges Protector is able to protect against high 100V at 50ms surges and spikes $\pm 250V$ at 100us.

Dual Battery Charger

The Dual Battery Charger, originally designed for DR8 tablet computer, is compatible with DT6 and can be used to simultaneously charge two DT6 batteries using the primary battery charging slots.

It accepts power from AC adapter or vehicle adapter to your batteries, and takes approximately 3 hours to charge one battery (6 hours to fully charge two batteries).

Handle

An optional handle can be attached to the left side of your tablet computer for ease of handling the unit during transportation.

Chapter 8 - Maintenance and Service

Cleaning

ALWAYS turn OFF the power, unplug the power cord and remove the battery before cleaning.

The exterior of the system and display may be wiped with a clean, soft, and lint-free cloth. If there is difficulty removing dirt, apply non-ammonia, non-alcohol based glass cleaner to the cloth and wipe.

An air gun is recommended for cleaning water and dust. For salty water please clean with fresh water then blow-dry with an air gun. Be sure not to turn the computer up-side down while there is water being applied.

Troubleshooting

Should the computer fail to function properly, the troubleshooting steps below may be followed.

- Check AC / vehicle adapter, battery, and the power source.
- Minimize the configuration, i.e. remove extra peripherals and devices.
- Remove the software suspected.
- Set BIOS fail-safe default.
- Re-install Operating System and Application Software.

RMA Service

If troubleshooting steps are unsuccessful, consult your dealer for RMA.

Shipping instructions:

1. Remove any personal data.
2. Use the original shipping container and packing materials, if possible.
3. If the original packing materials are not available, wrap the equipment with soft material (e.g. PU/PE form) then put the wrapped equipment into a hard cardboard shipping box.
4. Include a sheet with the following information: (Note: Please keep a copy of this sheet for your records)
 - Name
 - Address
 - Unit serial number
 - Place and date of purchase or the original invoice number
 - Date of failure
5. A DETAILED Description of the problems you have encountered
6. A list of the hardware/software configuration, if applicable.
7. Clearly mark the outside of the shipping box with the RMA #. If RMA # is not present on the shipping box, receiving will be unable to identify it and it might be returned.
8. Unless prior arrangements have been made, the customer is responsible for all shipping costs. Unauthorized use of the company's shipping accounts is not permitted.